

AD-A210 503

USAARL Report No. 89-6



**Cockpit Lighting Compatibility
with Image Intensification Night Imaging Systems:
Issues and Answers**

(Reprint)


By

**Clarence E. Rash
Sensory Research Division**

and

**Robert W. Verona
Center for Night Vision and Electro-Optics
Fort Belvoir, Virginia**

May 1989

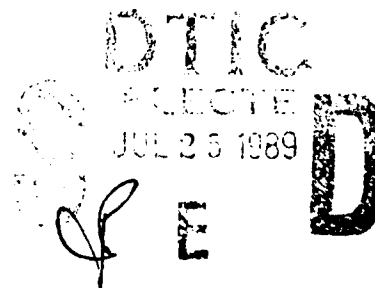

Approved for public release; distribution unlimited.

**United States Army Aeromedical Research Laboratory
Fort Rucker, Alabama 36362-5292**

89 7 25 079

Notice

Qualified requesters

Qualified requesters may obtain copies from the Defense Technical Information Center (DTIC), Cameron Station, Alexandria, Virginia 22314. Orders will be expedited if placed through the librarian or other person designated to request documents from DTIC.

Change of address

Organizations receiving reports from the U.S. Army Aeromedical Research Laboratory on automatic mailing lists should confirm correct address when corresponding about laboratory reports.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

Disclaimer

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision unless so designated by other official documentation. Citation of trade names in this report does not constitute an official Department of the Army endorsement or approval of the use of such commercial items.

Reviewed:



BRUCE C. LEIBRECHT, Ph.D.

LTC, MS

Director, Sensory Research
Division




J. D. LaMOTHE, Ph.D.

COL, MS

Chairman, Scientific
Review Committee

Released for publication:

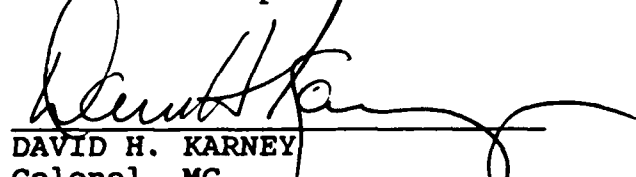

DAVID H. KARNEY
Colonel, MC
Commanding

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS N/A		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION / AVAILABILITY OF REPORT Approved for public release; distribution unlimited		
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
4. PERFORMING ORGANIZATION REPORT NUMBER(S) USAARL Report 89-6			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION U.S. Army Aeromedical Research Laboratory		6b. OFFICE SYMBOL (if applicable) SGRD-UAS-VS		7a. NAME OF MONITORING ORGANIZATION U.S. Army Medical Research and Development Command	
6c. ADDRESS (City, State, and ZIP Code) Fort Rucker, AL 36362-5292		7b. ADDRESS (City, State, and ZIP Code) Fort Detrick Frederick, MD 21701-5012			
8a. NAME OF FUNDING / SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (if applicable) SGRD-PLC		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER	
8c. ADDRESS (City, State, and ZIP Code)		10. SOURCE OF FUNDING NUMBERS			
		PROGRAM ELEMENT NO. 62787A		PROJECT NO. 3E162787A879	
		TASK NO. BG		WORK UNIT ACCESSION NO. 164	
11. TITLE (Include Security Classification) Cockpit Lighting Compatibility with Image Intensification Night Imaging Systems: Issues and Answers (U) (Reprint)					
12. PERSONAL AUTHOR(S) Rash, Clarence E. and Verona, Robert H.					
13a. TYPE OF REPORT		13b. TIME COVERED FROM _____ TO _____		14. DATE OF REPORT (Year, Month, Day) 1989 May	
				15. PAGE COUNT 9	
16. SUPPLEMENTARY NOTATION This report is a reprint of a presentation made at the SPIE's 1989 Technical Symposium on Optics, Electro-Optics and Sensors, 27-31 March 1989. Also published in the Proceedings.					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP			
20	06		ANVIS, cockpit lighting, MIL-L-85762		
23	02				
19. ABSTRACT (Continue on reverse if necessary and identify by block number) Night imaging systems based on image intensification (I²) tubes are a major factor in the night operation capability of U.S. Army rotary-wing aircraft. A major problem associated with the use of these systems is the detrimental effect caused by internal cockpit lighting. Instrument lamps, caution lamps, utility lights, and other light sources inside the cockpit activate the bright source protection control circuits of the intensification tubes, thereby reducing their sensitivity to external natural and artificial illumination. In 1986, a Tri- Service specification, MIL-L-85762, "Lighting, aircraft, interior, night vision imaging system compatible," was adopted to resolve the cockpit lighting problems. MIL-L-85762 defines the measurement instrumentation and techniques required to certify lighting components as "ANVIS compatible." The specification does not address compatibility problems associated with AN/PVS-5 usage. Ongoing efforts related to MIL-L-85762 include characterization of lighting incompatibilities in current U.S. Army aircraft, implementation of programs to modify the lighting in incompatible cockpits, and certification of proposed lighting components for					
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Chief, Scientific Information Center			22b. TELEPHONE (Include Area Code) (205) 255-6907		22c. OFFICE SYMBOL SGRD-UAX-ST

19. ABSTRACT (cont'd)

future aircraft systems. Additional work has been done to provide "near compatible" solutions to lighting problems associated with the use of AN/PVS-5 systems.

**Cockpit Lighting Compatibility
with Image Intensification Night Imaging Systems:
Issues and Answers**

Clarence E. Rash
Robert W. Verona

U.S. Army Aeromedical Research Laboratory
Fort Rucker, Alabama 36362-5292

Center for Night Vision and Electro-Optics
Fort Belvoir, Virginia 22060-5677



Accession For	
MIL-STD-1750	
FED. TAX	
Unannounced	
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

ABSTRACT

Night imaging systems based on image intensification (I^2) tubes are a major factor in the night operation capability of U.S. Army rotary-wing aircraft. A major problem associated with the use of these systems is the detrimental effect caused by internal cockpit lighting. Instrument lamps, caution lamps, utility lights, and other light sources inside the cockpit activate the bright source protection control circuits of the intensification tubes, thereby reducing their sensitivity to external natural and artificial illumination. In 1986, a Tri-Service specification, MIL-L-85762, "Lighting aircraft interior, night vision imaging system compatible," was adopted to resolve the cockpit lighting problems. MIL-L-85762 defines the measurement instrumentation and techniques required to certify lighting components as "ANVIS compatible." The specification does not address compatibility problems associated with AN/PVS-5 usage. Ongoing efforts related to MIL-L-85762 include characterization of lighting incompatibilities in current U.S. Army aircraft, implementation of programs to modify the lighting in incompatible cockpits, and certification of proposed lighting components for future aircraft systems. Additional work has been done to provide "near compatible" solutions to lighting problems associated with the use of AN/PVS-5 systems.

1. BACKGROUND

U.S. Army aviation has a doctrine of being able to carry out missions in darkness and adverse weather conditions. To support this doctrine, night vision imaging systems have been introduced into the cockpit. As early as 1971, modified versions of a ground used system, the AN/PVS-5 Night Vision Goggles (NVG), were in use in U.S. Army aircraft. These first systems were a binocular mounting of second generation image intensification (I^2) tubes. Currently a new system, the Aviator's Night Vision Imaging System (ANVIS), is being fielded (Figure 1).

The ANVIS are passive, helmet-mounted, binocular devices that utilize third generation I^2 tubes. These tubes, which have a spectral response from 450 to 930 nanometers (nm), are extremely sensitive to radiation in the 600 to 900 nm portion of the electromagnetic spectrum (orange to near infrared). ANVIS operate by converting photons from an external scene into electrons using a Gallium-Arsenide photocathode, amplifying these electrons with a microchannel plate, and converting them back into visible light as they impinge upon a phosphor screen.

Because ANVIS amplify the intensity of light sources approximately 2000 times, bright lights emitting energy in that portion of the electromagnetic spectrum in which the ANVIS are sensitive produce severe veiling glare that can obscure the overall image.¹ To prevent this, and to protect the image intensifier assembly from permanent phosphor burns, ANVIS are equipped with a bright source protection (BSP) circuit, which operates as an automatic gain control. The BSP circuit decreases the sensitivity of the image intensifier tubes when they are exposed to bright lights emitting energy in the ANVIS-sensitive portion of the electromagnetic spectrum.

A more subtle problem develops when the ANVIS are exposed to light sources located inside the cockpit. Whenever these sources emit energy in the ANVIS-sensitive region, the ANVIS BSP is activated, reducing ANVIS

response to energy originating from the external scene. The net result is a reduced capability to view outside the cockpit, a result often unnoticed by the aviator.

An analogous problem has and does exist for the AN/PVS-5s. When first introduced, the AN/PVS-5s required the interior cockpit lighting level to be greatly reduced. Numerous methods, i.e., low-reflectance black paint, light louvers, filters, low intensity lamps, etc., have been attempted to provide "compatible" cockpits.² Only limited success was achieved using any of these methods.

Therefore, when the ANVIS were designed, this problem was a major consideration. One solution was to coat the interior surface of the objective lenses in the ANVIS with a dielectric film (called a "minus-blue filter") that would reject wavelengths less than 625 nm. This design was planned to make the ANVIS compatible with cockpits having blue-green crewstation lighting. However, programs to convert current aircraft to blue-green lighting have not been fully implemented due to technical and budgetary constraints.

In 1983, after years of compatibility problems with the AN/PVS-5 and the potential ANVIS problems, a Joint Aeronautical Commanders Tri-Service Committee was established. Its goal was to develop a military specification for ensuring future ANVIS compatibility. The result was MIL-L-85762, "Lighting aircraft interior, night vision imaging system compatible." This specification defines acceptable parameters for compatible lighting components. It also details instrumentation and methodology requirements for validating these components.

2. MILITARY SPECIFICATION MIL-L-85762

This military specification must be applied to all modes and types of interior aircraft lighting, from components to systems, which will contribute to any environment where third generation I² tubes are to be used.³ It defines performance, testing, and acceptance requirements for the purpose of ensuring standardized aircraft ANVIS compatibility.

The instrumentation required to verify ANVIS compatibility consists of a spectroradiometer, a photometer, and a reflectance standard. The instrumentation must meet certain specifications for accuracy and sensitivity. For the spectroradiometer these specifications include radiance sensitivity and accuracy, wavelength accuracy and repeatability, current resolution, zero drift, linearity, and stray light.

The spectroradiometer is used to make spectral radiance and chromaticity measurements. As a complete system, the spectroradiometer must provide the capability to measure the radiance levels at a half-power band width of 10 nm and a signal to root-mean-square noise ratio of 10 to 1. These levels are: 1.0E-10 W/cm²-sr-nm over 380-600 nm, 1.0E-11 W/cm²-sr-nm over 600-900 nm, and 1.0E-10 W/cm²-sr-nm over 900-930 nm. A sensitivity calibration must be performed within 6 months prior to taking a measurement. A wavelength accuracy of 1 nm is required.

The procedures for qualifying a lighting subsystem in accordance with MIL-L-85762 include, but are not limited to, unaided eye inspection, examination with ANVIS, human engineering inspection, luminance uniformity check, reflection examination, electromagnetic interference tests, and luminance, chromaticity, and spectral radiance measurements. An aircrew station mockup can be required for most of the tests. However, the spectral radiance, luminance, and chromaticity measurements are usually made in a laboratory setting (usually with a scaled down mockup instrument panel).

Spectral radiance data are measured in 5 nm steps over the spectral range of 380 to 930 nm. Measurements are taken with the lighting component luminance set by the rated drive condition or at 15.0 footlamberts, whichever is less. A luminance scaling factor (S) is calculated using the ratio of the specified test luminance (cited in MIL-L-85762) to the actual measured test luminance. For most lighting subsystems, the specified test luminance is 0.1 footlamberts.

Once the spectral radiance is measured, it is used to calculate a value called "ANVIS radiance." This value is defined as,

$$\text{ANVIS radiance} = SG(\lambda)_{\max} \int_{450}^{930} G(\lambda)N(\lambda)d\lambda \quad (\text{Equation 1})$$

Where,

S	= scaling factor
$G(\lambda)_{\max}$	= 1 mA/W
$N(\lambda)$	= spectral radiance of lighting component (W/cm ² -sr-nm)
$G(\lambda)$	= relative ANVIS response
$d\lambda$	= 5 nm

The maximum allowed ANVIS radiance value for most lighting subsystems, when calculated using Equation 1, is 1.7E-10. This value is derived from the application of Equation 1 to a selected target considered to be operationally significant and possessing low visibility, that of a defoliated tree illuminated by starlight.⁴

The luminance measurement may be made using the spectroradiometer or a photometer meeting the required specifications. When using the spectroradiometer, the luminance is calculated as follows:

$$L = 929\pi K(\lambda)_{\max} \int_{380}^{780} K(\lambda)N(\lambda)d\lambda \quad (\text{Equation 2})$$

Where,

L	= luminance (footlamberts)
$K(\lambda)$	= normalized visual efficiency curve for 1931 CIE standard observer
$K(\lambda)_{\max}$	= 683 lumens/watt
$N(\lambda)$	= spectral radiance of lighting component (W/cm ² -sr-nm)
$d\lambda$	= 5 nm

The calculated, or measured, luminance value is used to define the scaling factor required in Equation 1 for the calculation of ANVIS radiance.

Chromaticity coordinates also are calculated from the spectral radiance data using the 1931 Commission Internationale de l'Eclairage (CIE) and 1976 Uniform Color Scale (UCS) theories.⁵ The measured UCS coordinates (u' , v') for general crewstation lighting are required to lie within a color circle, referred to as "Green ANVIS A," and defined as,

$$(u' - u_1')^2 + (v' - v_1')^2 \leq (r)^2, \quad (\text{Equation 3})$$

where $u_1' = 0.088$ and $v_1' = 0.543$ define the center, and $r = 0.037$ defines the radius of the circle (Figure 2).

3. SEARCHING FOR COMPATIBLE COMPONENTS

Three different projects relating to testing and evaluation for ANVIS lighting compatibility currently are in progress. Two of the projects, involving panel lamps and supplemental pilot lighting aids, require strict compliance with MIL-L-85762. The third project, involving ANVIS compatible flashlight filters, falls into an area which currently is not addressed in the specification. Representative components are shown in Figure 3.

Panel lamps

With an ANVIS compatible cockpit as a goal, the U.S. Army is attempting to redesign cockpit instruments which incorporate light sources or, where possible, replace current lamps with ones which meet MIL-L-85762. The replacement lamps tend to be tungsten filaments surrounded by a filter material. To obtain a compatible lamp, the filter material must severely reduce the spectral radiance of the filament for wavelengths beyond 600 nm. The filter also must produce a final lamp assembly whose chromaticity coordinates meet MIL-L-85762 requirements.

Several panel lamp assembly designs have been evaluated and found to meet the MIL-L-85762 requirements. A typical spectral radiance curve representing the lamp assemblies tested is provided in Figure 4. These data multiplied by the ANVIS response curve are shown in Figure 5. The average ANVIS radiance value of these lamp assemblies is $1.1\text{E-}10$, meeting the requirement of a maximum allowable value of $1.7\text{E-}10$. The chromaticity coordinates are also within specification.

Only one problem seems to exist for the various lamp assemblies tested and found to meet MIL-L-85762 requirements. The differences in design and choice of filtering material have produced lamp assemblies which provide a wide range of luminance values for a given operating voltage. Since numerous instruments often operate from a single power bus, mixing lamps from different manufacturers may result in the inability to balance the luminance across the overall instrument panel.

Supplemental lighting

One result of the various lighting modifications implemented to achieve ANVIS cockpit compatibility is a reduction in the overall level of illumination in the cockpit. This has created the need for supplemental lighting devices, referred to as pilot lighting aids (PLAs). These devices will give crewmembers the capability to selectively illuminate certain instruments or recessed areas of the aircraft.

Two classes of lighting aids are being considered: lip lights and finger lights. Lip lights are lip-activated, microphone-mounted devices using light emitting diodes (LEDs) as the light source. Finger lights use a similar concept, but are worn about the aviator's gloved finger.

In addition to meeting the radiance and chromaticity specifications of MIL-L-85762, these lighting aids must satisfy certain other requirements. While most of these additional requirements involve health hazard and human factors issues, there is one which further constrains the characteristics of the actual lighting source. This constraint is that 95 percent of the source's energy output must be confined within the spectral range of 400-600 nm.

None of the PLA designs submitted for evaluation met all of the stated requirements. Representative spectral radiance and "ANVIS weighted" curves are provided in Figures 6 and 7, respectively. All of the samples tested failed to meet the MIL-L-85762 requirements for ANVIS radiance (typical measured value of $2.5\text{E-}09$) and chromaticity. In addition, all of the designs suffered from inadequate human factors engineering, mostly associated with the location and operation of the switches.

Flashlight filters

An important task for the aviator, both prior to and during flight, is navigation. This function requires the reading of color-coded maps. It has been determined a need exists to develop flashlight filters, compatible with current U.S. Army flashlights, which will provide this capability, but not severely degrade ANVIS operation.

MIL-L-85762 does not cover the compatibility requirements for such filters. In addition, the nature of the function of the flashlight and filter, i.e., map reading, necessitates special requirements which conflict with those of the lighting components addressed in the military specification. The Naval Air Development Center, Warminster, Pennsylvania, in coordination with various U.S. Army agencies, has developed a set of proposed requirements for these filters. The requirements specify allowable values for ANVIS radiance, chromaticity, and photopic transmittance.

The spectral transmittance of a proposed ANVIS compatible flashlight filter is measured using the equipment and techniques defined in the MIL-L-85762. This transmittance function then is mathematically multiplied by a 2100 degrees Kelvin black body curve. The resulting data are analyzed for chromaticity, ANVIS radiance (when scaled to

0.1 footlambert), and photopic transmittance. The chromaticity of the filter, expressed in the UCS system of coordinates, must be within the area bounded by a circle with a center point of $u' = 0.180$, $v' = 0.500$ and radius of $r = 0.055$. The photopic transmittance must be at least 10 percent at 2100 degrees Kelvin and the ANVIS radiance, when scaled to 0.1 footlambert, must not exceed $1E-09$. The differences between the requirements for the filter/flashlight combination and the lighting sources covered by MIL-L-85762 are a result of the necessity of providing light with a broader spectral content to provide the capability of color discrimination with the maps.

Fifteen different filter types have been tested. These filters were all off-the-shelf items originally designed for other applications. While no single filter type met all of the requirements, most of the filters did meet those of photopic transmittance and ANVIS radiance. Only four of the filter types met the chromaticity requirement. A curve representing the spectral transmittance of one filter type meeting the ANVIS radiance requirement is provided in Figure 8. For this particular filter, the measured ANVIS radiance value was $5.8E-10$.

Adjusting the chromaticity of one or more of the filters which met the ANVIS radiance and photopic transmittance specifications should result in filters which will provide the capability of map reading while maintaining an acceptable level of ANVIS compatibility.

4. SUMMARY

The operational performance of the U.S. Army's Aviator's Night Vision Imaging System (ANVIS) is degraded by certain instrument lamps and other light sources used within the cockpit. Using a military specification developed to ensure ANVIS lighting compatibility (MIL-L-85762), proposed replacement instrument lamps and an array of supplemental pilot lighting aids have been evaluated for their compatibility with ANVIS.

5. ACKNOWLEDGMENTS

The authors wish to thank Mr. John W. Parker III, Ms. Laurie Bryner, and Mr. Charles Halsted of the Naval Air Development Center, Warminster, PA, for their technical assistance and guidance in the understanding and application of MIL-L-85762.

Special note: This paper addresses lighting compatibility issues associated with U.S. Army use of the Aviator's Night Vision Imaging System (ANVIS), which uses a 625 nm cutoff filter. Lighting components and subsystems intended for use with ANVIS are designated as "Class A" components and subsystems. An alternate classification is used for components and subsystems intended for Night Vision Imaging Systems using a 665 nm cutoff filter. This classification is addressed in a revised version of the military specification (MIL-L-85762A).

Disclaimer: The views, opinions, and/or findings contained in this paper are those of the authors and should not be construed as an official Department of the Army position unless so designated by other official documentation.

6. REFERENCES

1. Keane, J., "Forward looking infrared and Night Vision Goggles, a pilot's perspective related to JVX," Naval Air Development Center, Warminster, PA (1984).
2. Holly, F. F., "A Night Vision Goggle compatible lighting system for Army aircraft," USAARL LR-80-4-2-2, Fort Rucker, AL (1980).
3. Department of Defense, Military specification: Lighting, aircraft, interior, night vision imaging system compatible, MIL-L-85762, Department of Defense, Washington, DC (1986).
4. Reetz, F. R., "Rationale behind the requirements contained in Military Specifications MIL-L-85762 and MIL-L-85762A," NADC-87060-20, Naval Air Development Center, Warminster, PA (1987).
5. RCA Corporation, Electro-Optics handbook, RCA Corporation, Lancaster, PA (1978).

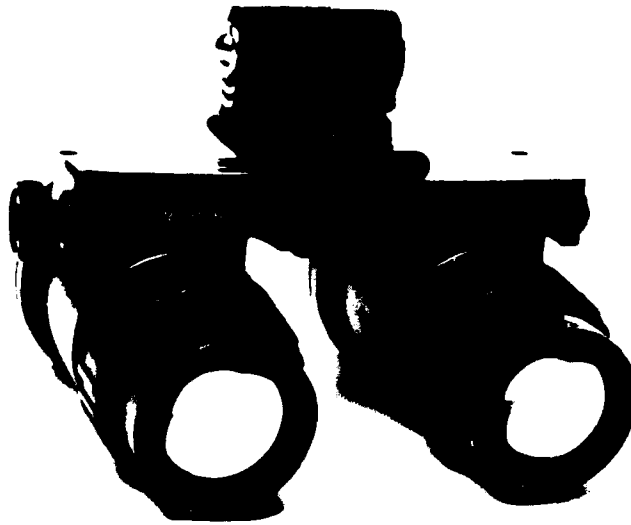


Figure 1. The Aviator's Night Vision Imaging System (ANVIS).

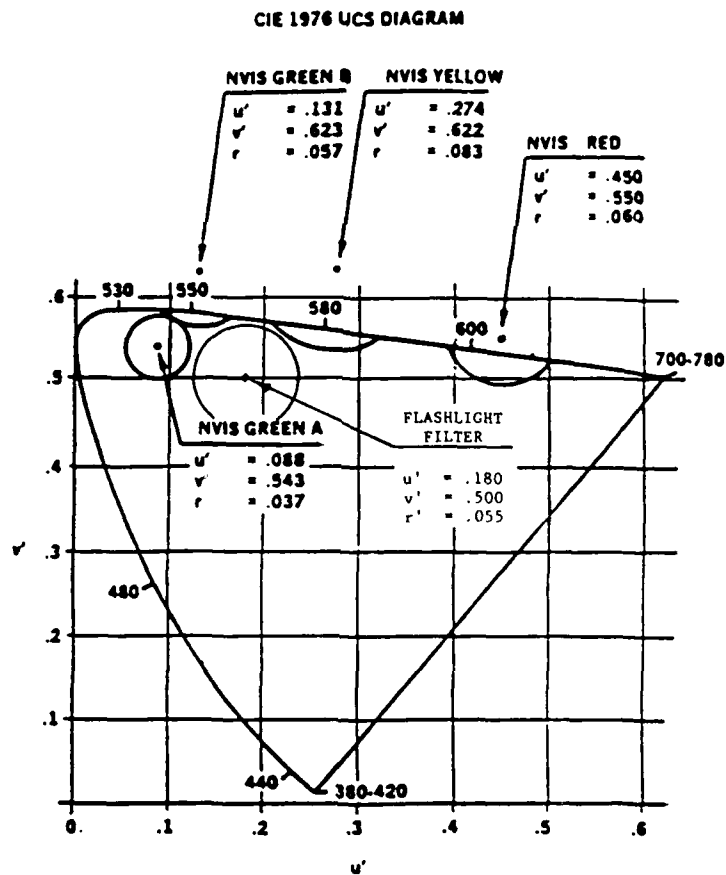


Figure 2. 1976 Uniform Color Scale diagram showing allowable color circle for ANVIS Green A lighting components.

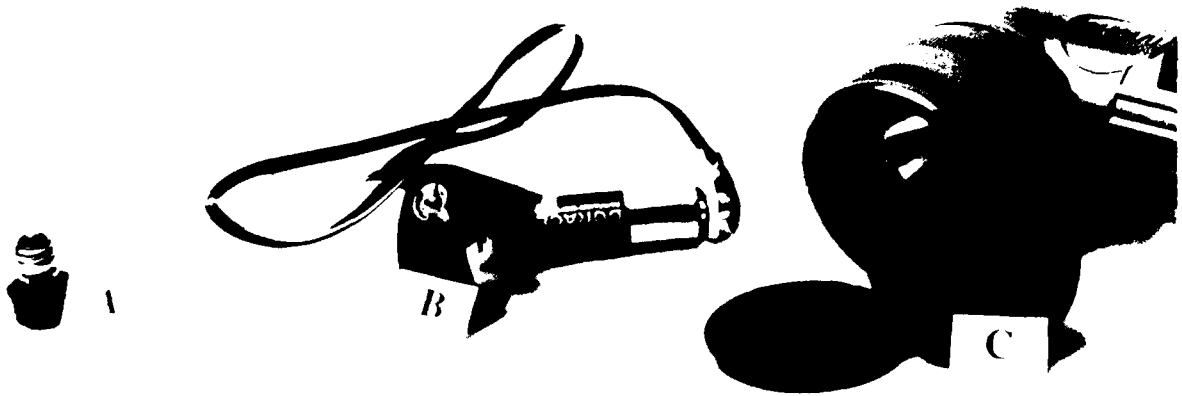


Figure 3. Samples of (a) panel lamps, (b) pilot lighting aids, and (c) flashlight filters under test for MIL-L-85762 compatibility.

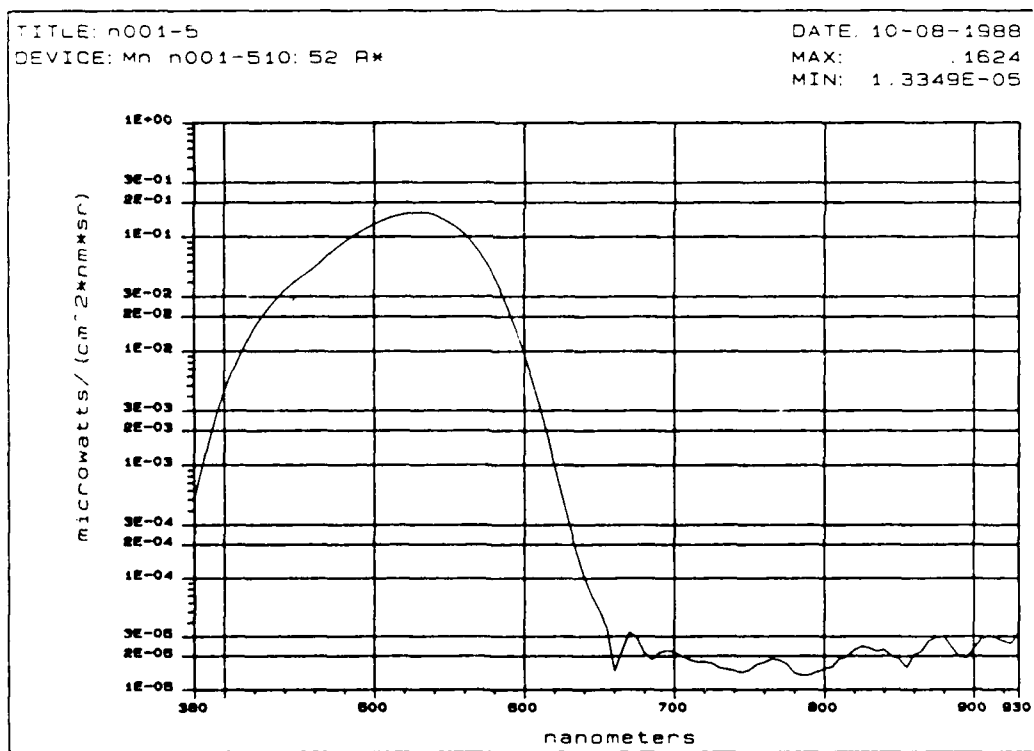


Figure 4. Spectral radiance curve for representative MIL-L-85762 compatible lamp.

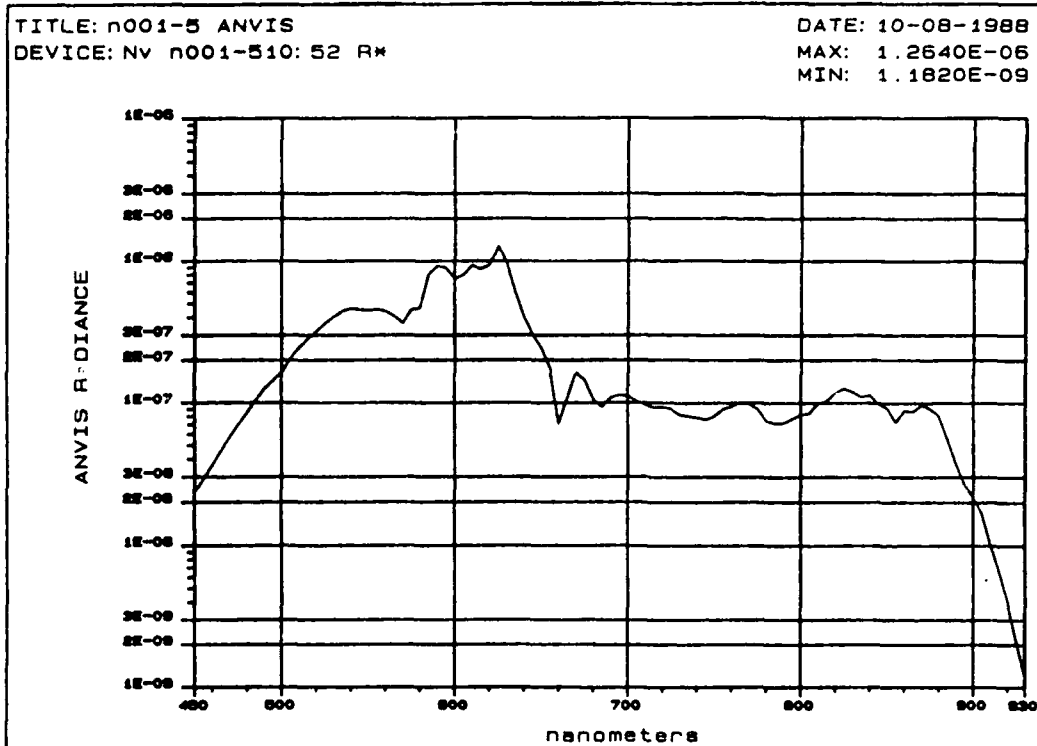


Figure 5. Spectral radiance data multiplied by ANVIS response for representative MIL-L-85762 compatible lamp.

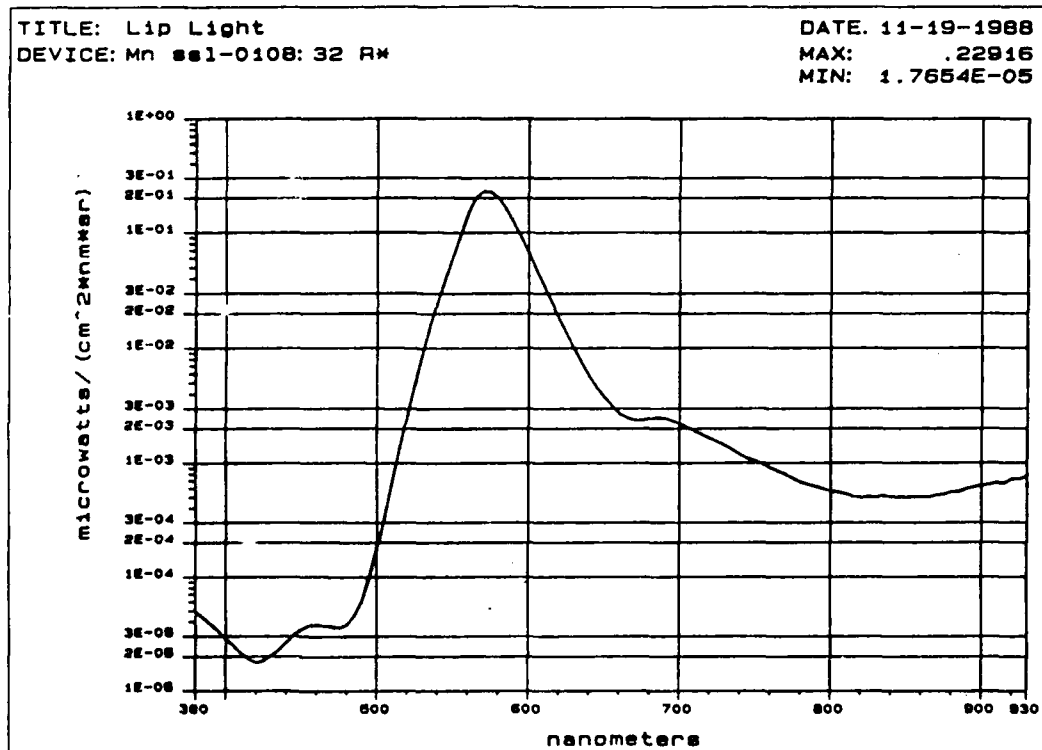


Figure 6. Spectral radiance curve for representative pilot lighting aid (PLA).

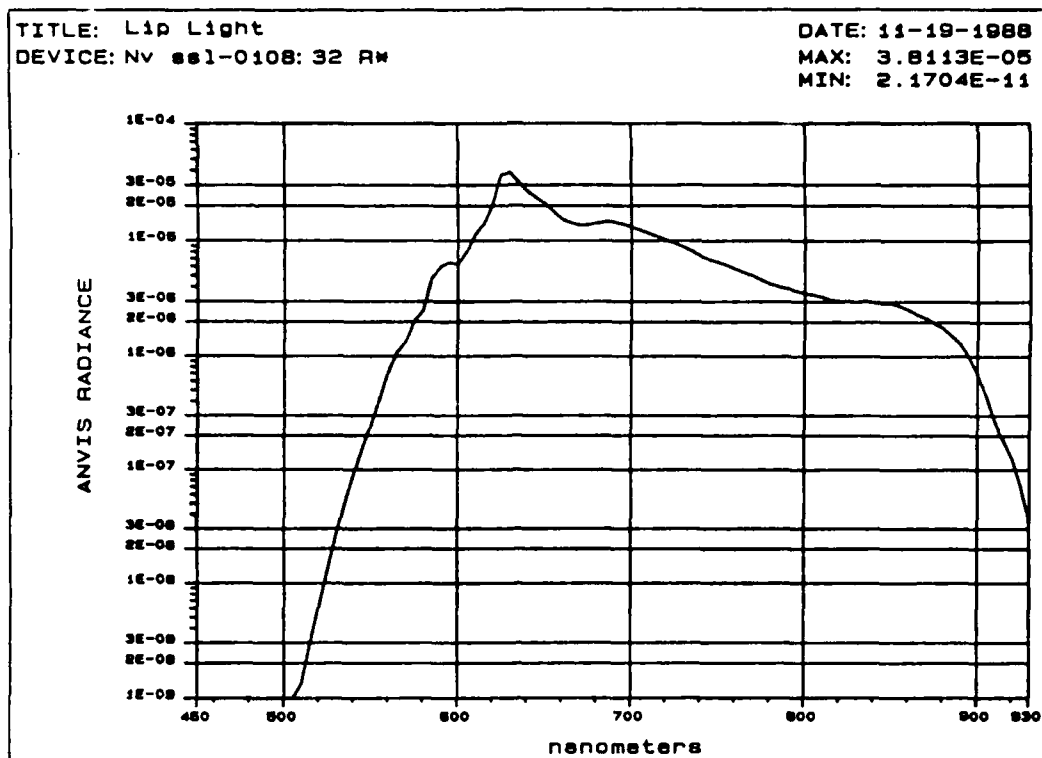


Figure 7. Spectral radiance data multiplied by ANVIS response for representative pilot lighting aid.

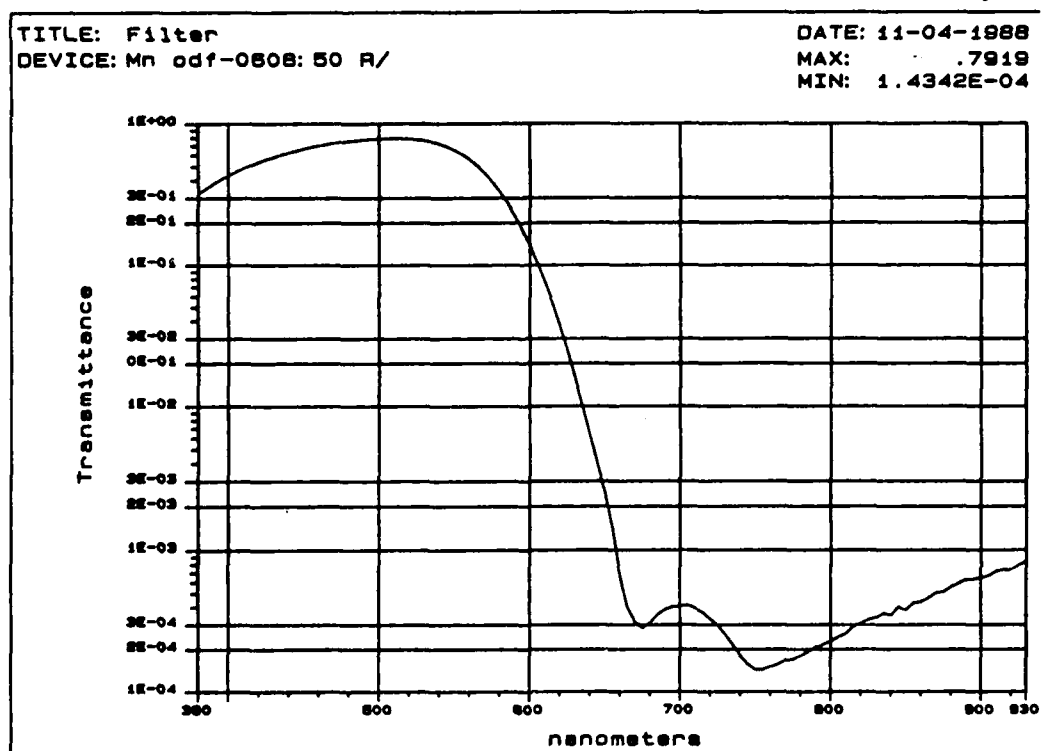


Figure 8. Spectral transmittance curve for a flashlight filter meeting the ANVIS radiance requirement.

Initial distribution

Commander
U.S. Army Natick Research
and Development Center
ATTN: Documents Librarian
Natick, MA 01760

Naval Submarine Medical
Research Laboratory
Medical Library, Naval Sub Base
Box 900
Groton, CT 05340

Commander/Director
U.S. Army Combat Surveillance
& Target Acquisition Lab
ATTN: DELCS-D
Fort Monmouth, NJ 07703-5304

Commander
10th Medical Laboratory
ATTN: Audiologist
APO NEW YORK 09180

Commander
Naval Air Development Center
Biophysics Lab
ATTN: G. Kydd
Code 60B1
Warminster, PA 18974

Naval Air Development Center
Technical Information Division
Technical Support Detachment
Warminster, PA 18974

Commanding Officer
Naval Medical Research
and Development Command
National Naval Medical Center
Bethesda, MD 20014

Under Secretary of Defense
for Research and Engineering
ATTN: Military Assistant
for Medical and Life Sciences
Washington, DC 20301

Commander
U.S. Army Research Institute
of Environmental Medicine
Natick, MA 01760

U.S. Army Avionics Research
and Development Activity
ATTN: SAVAA-P-TP
Fort Monmouth, NJ 07703-5401

U.S. Army Research and Development
Support Activity
Fort Monmouth, NJ 07703

Chief, Benet Weapons Laboratory
LCWSL, USA ARRADCOM
ATTN: DRDAR-LCB-TL
Watervliet Arsenal, NY 12189

Commander
Man-Machine Integration System
Code 602
Naval Air Development Center
Warminster, PA 18974

Commander
Naval Air Development Center
ATTN: Code 6021 (Mr. Brindle)
Warminster, PA 18974

Commanding Officer
Harry G. Armstrong Aerospace
Medical Research Laboratory
Wright-Patterson
Air Force Base, OH 45433

Director
Army Audiology and Speech Center
Walter Reed Army Medical Center
Washington, DC 20307-5001

COL Carl F. Tyner, MC
Walter Reed Army Institute
of Research
Washington, DC 20307-5100

HQ DA (DASG-PSP-0)
5109 Leesburg Pike
Falls Church, VA 22041-3258

Naval Research
Laboratory Library
Code 1433
Washington, DC 20375

Harry Diamond Laboratories
ATTN: Technical Infor-
mation Branch
2800 Powder Mill Road
Adelphi, MD 20783-1197

U.S. Army Materiel Systems
Analysis Agency
ATTN: Reports Processing
Aberdeen Proving Ground
MD 21005-5017

U.S. Army Ordnance Center
and School Library
Building 3071
Aberdeen Proving Ground,
MD 21005-5201

U.S. Army Environmental Hygiene
Agency
Building E2100
Aberdeen Proving Ground,
MD 21010

Technical Library
Chemical Research
and Development Center
Aberdeen Proving Ground,
MD 21010-5423

Commander
U.S. Army Institute
of Dental Research
Walter Reed Army Medical Center
Washington, DC 20307-5300

Naval Air Systems Command
Technical Air Library 950D
Rm 278, Jefferson Plaza II
Department of the Navy
Washington, DC 20361

Naval Research Laboratory Library
Shock and Vibration Infor-
mation Center, Code 5804
Washington, DC 20375

Director
U.S. Army Human Engineer-
ing Laboratory
ATTN: Technical Library
Aberdeen Proving Ground,
MD 21005-5001

Commander
U.S. Army Test
and Evaluation Command
ATTN: AMSTE-AD-H
Aberdeen Proving Ground,
MD 21005-5055

Director
U.S. Army Ballistic
Research Laboratory
ATTN: DRXBR-OD-ST Tech Reports
Aberdeen Proving Ground,
MD 21005-5066

Commander
U.S. Army Medical Research
Institute of Chemical Defense
ATTN: SGRD-UV-AO
Aberdeen Proving Ground,
MD 21010-5425

Commander
U.S. Army Medical Research
and Development Command
ATTN: SGRD-RMS (Ms. Madigan)
Fort Detrick, Frederick,
MD 21701

Commander
U.S. Army Medical Research
Institute of Infectious Diseases
Fort Detrick, Frederick,
MD 21701

Director, Biological
Sciences Division
Office of Naval Research
600 North Quincy Street
Arlington, VA 22217

Commander
U.S. Army Materiel Command
ATTN: AMCDE-XS (MAJ Wolfe)
5001 Eisenhower Avenue
Alexandria, VA 22333

Commandant
U.S. Army Aviation
Logistics School
ATTN: ATSQ-TDN
Fort Eustis, VA 23604

U.S. Army Training
and Doctrine Command
ATTN: ATCD-ZX
Fort Monroe, VA 23651

Structures Laboratory Library
USARTL-AVSCOM
NASA Langley Research Center
Mail Stop 266
Hampton, VA 23665

Naval Aerospace Medical
Institute Library
Bldg 1953, Code 102
Pensacola, FL 32508

Command Surgeon
U.S. Central Command
MacDill Air Force Base
FL 33608

Air University Library
(AUL/LSE)
Maxwell AFB, AL 36112

Commander
U.S. Army Biomedical Research
and Development Laboratory
ATTN: SGRD-UBZ-I
Fort Detrick, Frederick,
MD 21701

Defense Technical
Information Center
Cameron Station
Alexandria, VA 22313

U.S. Army Foreign Science
and Technology Center
ATTN: MTZ
220 7th Street, NE
Charlottesville, VA 22901-5396

Director,
Applied Technology Laboratory
USARTL-AVSCOM
ATTN: Library, Building 401
Fort Eustis, VA 23604

U.S. Army Training
and Doctrine Command
ATTN: Surgeon
Fort Monroe, VA 23651-5000

Aviation Medicine Clinic
TMC #22, SAAF
Fort Bragg, NC 28305

U.S. Air Force Armament
Development and Test Center
Eglin Air Force Base, FL 32542

U.S. Army Missile Command
Redstone Scientific
Information Center
ATTN: Documents Section
Redstone Arsenal, AL 35898-5241

U.S. Army Research and Technology
Laboratories (AVSCOM)
Propulsion Laboratory MS 302-2
NASA Lewis Research Center
Cleveland, OH 44135

AFAMRL/HEX
Wright-Patterson AFB, OH 45433

University of Michigan
NASA Center of Excellence
in Man-Systems Research
ATTN: R. G. Snyder, Director
Ann Arbor, MI 48109

John A. Dellinger,
Southwest Research Institute
P. O. Box 28510
San Antonio, TX 78284

Project Officer
Aviation Life Support Equipment
ATTN: AMCPO-ALSE
4300 Goodfellow Blvd.
St. Louis, MO 63120-1798

Commander
U.S. Army Aviation
Systems Command
ATTN: DRSAB-ED
4300 Goodfellow Blvd
St. Louis, MO 63120

Commanding Officer
Naval Biodynamics Laboratory
P.O. Box 24907
New Orleans, LA 70189

U.S. Army Field Artillery School
ATTN: Library
Snow Hall, Room 14
Fort Sill, OK 73503

Commander
U.S. Army Health Services Command
ATTN: HSOP-SO
Fort Sam Houston, TX 78234-6000

U.S. Air Force Institute
of Technology (AFIT/LDEE)
Building 640, Area B
Wright-Patterson AFB, OH 45433

Henry L. Taylor
Director, Institute of Aviation
University of Illinois-
Willard Airport
Savoy, IL 61874

Commander
U.S. Army Aviation
Systems Command
ATTN: DRSAB-WS
4300 Goodfellow Blvd
St. Louis, MO 63120-1798

Commander
U.S. Army Aviation
Systems Command
ATTN: SGRD-UAX-AL (MAJ Lacy)
4300 Goodfellow Blvd., Bldg 105
St. Louis, MO 63120

U.S. Army Aviation Systems Command
Library and Information
Center Branch
ATTN: DRSAB-DIL
4300 Goodfellow Blvd
St. Louis, MO 63120

Federal Aviation Administration
Civil Aeromedical Institute
CAMI Library AAC 64D1
P.O. Box 25082
Oklahoma City, OK 73125

Commander
U.S. Army Academy
of Health Sciences
ATTN: Library
Fort Sam Houston, TX 78234

Commander
U.S. Army Institute
of Surgical Research
ATTN: SGRD-USM (Jan Duke)
Fort Sam Houston, TX 78234-6200

Director of Professional Services
AFMSC/GSP
Brooks Air Force Base, TX 78235

U.S. Army Dugway Proving Ground
Technical Library
3Bldg 5330
Dugway, UT 84022

U.S. Army Yuma Proving Ground
Technical Library
Yuma, AZ 85364

AFFTC Technical Library
6520 TESTG/ENXL
Edwards Air Force Base,
CAL 93523-5000

Commander
Code 3431
Naval Weapons Center
China Lake, CA 93555

Aeromechanics Laboratory
U.S. Army Research
and Technical Labs
Ames Research Center,
M/S 215-1
Moffett Field, CA 94035

Sixth U.S. Army
ATTN: SMA
Presidio of San Francisco,
CA 94129

Commander
U.S. Army Aeromedical Center
Fort Rucker, AL 36362

Directorate
of Combat Developments
Bldg 507
Fort Rucker, AL 36362

U.S. Air Force School
of Aerospace Medicine
Strughold Aeromedical Library
Documents Section, USAFSAM/TSK-4
Brooks Air Force Base, TX 78235

Dr. Diane Damos
Department of Human Factors
ISSM, USC
Los Angeles, CA 90089-0021

U.S. Army White Sands
Missile Range
Technical Library Division
White Sands Missile Range,
NM 88002

U.S. Army Aviation Engineering
Flight Activity
ATTN: SAVTE-M (Tech Lib)
Stop 217
Edwards Air Force Base,
CA 93523-5000

Ms. Sandra G. Hart
Ames Research Center
MS 239-5
Moffett Field, CA 94035

Commander
Letterman Army Institute
of Research
ATTN: Medical Research Library
Presidio of San Francisco,
CA 94129

Director
Naval Biosciences Laboratory
Naval Supply Center, Bldg 844
Oakland, CA 94625

Commander
U.S. Army Medical Materiel
Development Activity
Fort Detrick, Frederick,
MD 21701-5009

Directorate
of Training Development
Bldg 502
Fort Rucker, AL 36362

Chief
Army Research Institute
Field Unit
Fort Rucker, AL 36362

Commander
U.S. Army Safety Center
Fort Rucker, AL 36362

U.S. Army Aircraft Development
Test Activity
ATTN: STEBG-MP-QA
Cairns AAF
Fort Rucker, AL 36362

Commander
U.S. Army Medical Research
and Development Command
ATTN: SGRD-PLC (COL Sedge)
Fort Detrick, Frederick
MD 21701

Chief
Human Engineering Laboratory
Field Unit
Fort Rucker, AL 36362

Commander
U.S. Army Aviation Center
and Fort Rucker
ATTN: ATZQ-T-ATL
Fort Rucker, AL 36362

President
U.S. Army Aviation Board
Cairns AAF
Fort Rucker, AL 36362